



RS7290 Shown on 2" PVC

Ratchet Shears



- Ratchet Shears are ideal for cutting up to 2" PVC, PE, PP, PEX, and ABS pipe and tubing.
- Smoothest ratchet action for easiest cuts.
- Replace or sharpen blades for longer tool life and faster cuts.

Catalog No.	Item Code	Capacity		Length		Weight	
		Actual Inches	Actual Ø mm	in	mm	lbs	kg
RS1PLT*	04175	1.7	42	8.3	210	1.0	0.4
RS1	04176	1.7	42	8.3	210	1.0	0.4
RS2	04177	2.4	63	17.0	440	2.5	1.1
RS7290	04182	2.4	63	13.25	337	2.4	1.1

*Features corrosion-resistant plated blade

Replacement Blades

Catalog No.	Item Code	Description
RS1B	94175	RS1 Blade
RS1BPLT	94180	RS1PLT Plated Blade
RS2B	94176	RS2 Blade
RS7290B	94555	RS7290 Blade

Scissor Shears

- Scissor Shears cut up to 1¼" diameter and are ideal for cutting thin wall and small diameter PE, rubber or nylon tubing.
- SC1SL and SC125SL are spring-loaded and have a new grip design for more secure hold.
- Replaceable Teflon®-coated or stainless steel blade for corrosion-resistance.
- For safety and ease of operation, use Scissor Shears with blade on bottom.



Catalog No.	Item Code	Capacity		Length		Weight	
		Actual Inches	Actual Ø mm	in	mm	lbs	kg
SC1SS	04169	1.3	32	8.0	203	0.3	0.1
SC1	04174	1.3	32	8.0	203	0.3	0.1
SC1SL*	04272	1.3	32	8.0	203	0.3	0.1
SC125	04178	1.7	42	8.3	210	0.3	0.1
SC125SL*	04273	1.7	42	8.3	210	0.3	0.1

*NEW!


Replacement Blades

Catalog No.	Item Code	Description
SC1B	94170	Teflon® Coated Blade for SC1, SC1SL
SC1BSS	94187	Stainless Steel Blade for SC1, SC1SS
SC125B	94169	Teflon® Coated Blade for SC125, SC125SL



PIPE TOOLS & VISES
SINCE 1896

PE Squeeze-Off Tool

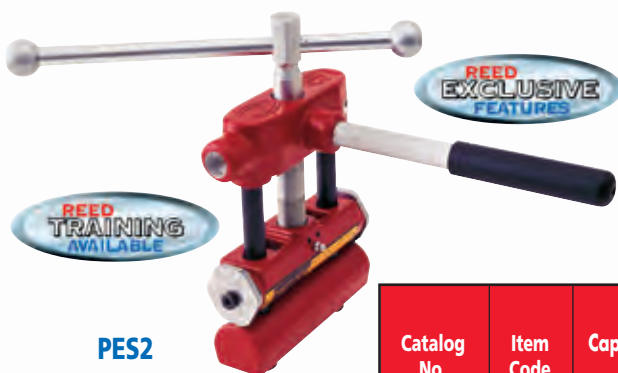

PES2

✓ WHY REED?
Self-contained tool; no loose parts.

- For IPS and/or CTS PE.
- 4 sizes cover 1/2" to 8" (305 mm - 711 mm).
- Easy to use in line because of swing bar and no loose parts.
- For clearance options, two handle locations on the PES2 and PES4 are provided to counter torque.
- Durable, with hardened steel nut and grease fittings.
- Easy to change stops to convert from pipe to tubing and back.
- Fine threads for more controlled, easier squeeze.
- Custom stops available for PES2 models, including metric measures.


Catalog No.	Item Code	Capacity	Pipe/SDR Stops	Length		Weight	
				in	mm	lbs	kg
PES1IPS	04290	1/2 - 1"	3	11	280	6.5	3.0
PES1CTS	04292	1/2 - 1"	3	11	280	6.5	3.0
PES2IPS	04302	1/2 - 2"	6	12	305	11.6	5.3
PES2CTS	04304	1/2 - 2"	6	12	305	11.6	5.3
PES2PC160†	04305	1/2 - 2"	6	12	305	11.6	5.3
PES4	04306	2 - 4"	7	20	508	38.6	17.5
PES8M	04308	3 - 8"	12	28	711	130	59.1
PES8H	04309	3 - 8"	12	28	711	130	59.1

† Rated for working pressure of 160 psi



PES8M

Guillotine Cutter

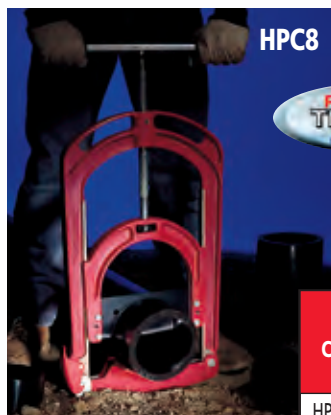

HPC8

✓ WHY REED?
Straighter cuts than other guillotine style cutters and longer lasting with stronger castings.

- Cuts PE up to 12" (350 mm).
- Squarest cut available, within 1/8" (3 mm) on medium and high density pipe, due to strong frames and unique blade design.
- Saves facing cost: no facing needed for electrofusion, less needed for butt-fusion.
- Requires minimal clearance, only 4 - 5" (102 - 127 mm) around pipe.
- Clean and safe! No chips to clog valves and apertures.
- Many high quality cuts, with durable Teflon®-coated resharpenable and replaceable tool steel blade.
- For wall thickness designated as SDR 17 or thinner, HPC8TN is the desired cutter for 3 - 8" (90-225 mm) pipe.

Catalog No.	Item Code	Capacity		Length		Weight	
		Inches Nom.	Actual Ø mm	in	mm	lbs	kg
HPC4	04604	2 - 4	63 - 125	19	482	17	7.7
HPC8	04608	3 - 8	90 - 225	30	750	29	13.0
HPC12	04612	4 - 12	125 - 350	51	1295	101	45.9
HPC8TN**	04618	3 - 8	90 - 225	30	750	34.5	15.7

****EXCLUSIVE!**

Replacement Blades

Catalog No.	Item Code	Description
HPC4B	40329	HPC4 Blade
HPC8B	40027	HPC8 Blade
HPC12B	94903	HPC12 Blade
HPC8TNB	94137	HPC8TN Blade



HPC8TN



HPC12

Order Through Your Reed Distributor:



PIPE TOOLS & VISES
SINCE 1896

Reed Manufacturing Company
1425 West 8th Street Erie, PA 16502 USA
800-666-3691 or 814-452-3691
Fax 800-456-1697 or 814-455-1697
www.reedmfgco.com